

SUB-10

10" 200 Watt Floor Standing Subwoofer

The goal was to create the finest speakers available. How is such a lofty goal achieved? It starts with a management team that has been designing products for the architectural audio market for over 20 years. One of those products resides in our industry's Hall of Fame. The team's experience and engineering expertise is then combined with passion to create speakers that stand apart from the ordinary. To us, great speakers create great music.

Our team is genuinely excited about music and still gets a thrill when we listen to our favorite music perfected on one of our newest creations.

FEATURES

- Front mounted volume control.
- Front mounted ports.
- Stable cool running 200 watt amplifier.
- Auto on via audio sensing.
- Auto standby.
- 50 Hz to 150 Hz crossover adjustment.
- 0 to 180 phase control.
- Line level and LFE inputs and outputs.
- Speaker level inputs and outputs.
- Switching power supply 110V/230V.
- 3 Year Warranty



SUB-10

Dimensions: 16" H, 12.5" W, 15 1/4" D

CONTROLS


Auto feature will switch your subwoofer on and off automatically by signal detection.

Crossover adjustment

Phase adjustment

Main voltage selector

Main power ON/OFF Switch

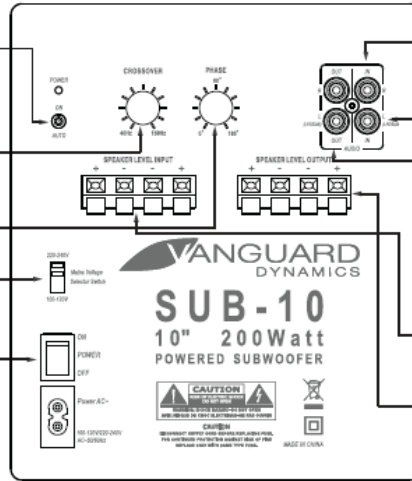

CONNECTIONS

Connect to left and right Line inputs if using with a 2-channel hi-fi system.

Connect to left (LFE/SUB) Line in socket if using an AV receiver or Amp with Sub out.

To connect a second subwoofer use the Line out sockets.

Connect to Speaker Level Input if using speaker wires.

Connect Speaker Level Output to speakers.

Main voltage selector

